





AYAA TECHNOLOGY CO.,LTD
PCM Specifications

Model: PCM-LI04S8-026 (LI-4S7A) IC: S8254AAJ+AO4407A*4 ver: A

Test item (Test at normal temperature $25\pm 2^\circ\text{C}$)		Criterion
Voltage	Charging voltage	DC: 16.8V CC/CV (4.2v/Cell) 4s
Supply Current	Normal operating mode current: Fuel gauge in NORMAL mode. ILOAD > Sleep Current	$\leq 20\mu\text{A}$
	Maximal continuous charging current	7A
	Maximal continuous discharging current	7A
Over-charge Protection (single cell)	Balance voltage for single cell	/
	Over charge detection voltage	$4.35\pm 0.05\text{V}$
	Over charge detection delay time	$0.5\text{s}\text{--}2\text{s}$
	Over charge release voltage	$4.15\pm 0.1\text{V}$
Over discharge protection (single cell)	Over discharge detection voltage	$2.4\pm 0.05\text{V}$
	Over discharge detection delay time	$10\text{--}200\text{ms}$
	Over discharge release voltage	$3.0\pm 0.1\text{V}$
Current protection (Battery pack)	Charge Over current detection current	/
	Detection delay time	/
	Discharge Over current detection current	$20\pm 3\text{A}$
	Detection delay time	$5\text{ms}\text{--}20\text{ms}$
	Release condition	Cut load, Auto Recovery
Short protection	Detection condition	Exterior short circuit
	Detection delay time	$200\text{--}600\text{us}$
	Release condition	Cut load
Resistance	Main loop electrify resistance	$\leq 65\text{m}\Omega$
Temperature	Operating Temperature Range	$-40\text{--}+85^\circ\text{C}$
	Storage Temperature Range	$-40\text{--}+125^\circ\text{C}$

SIZE: L100 *W16 *T3 mm

NTC: / Temperature switch: / Weak current switch: / Activation Method:/

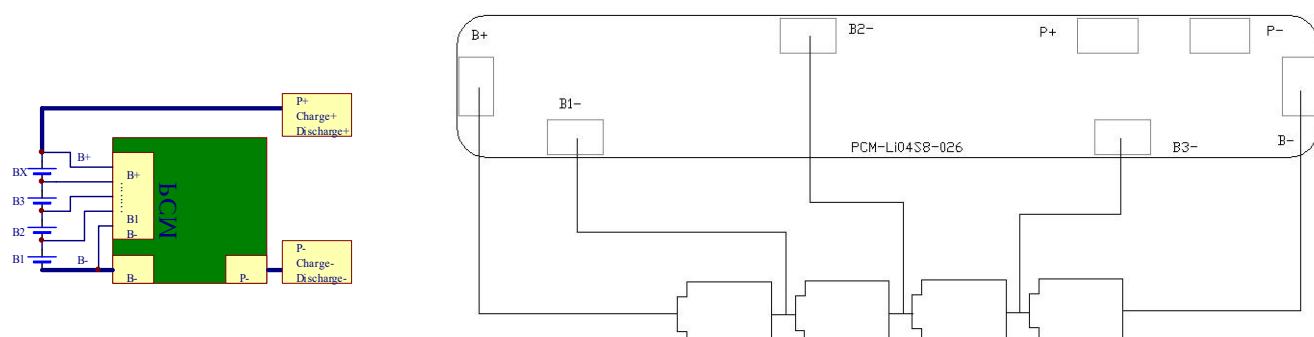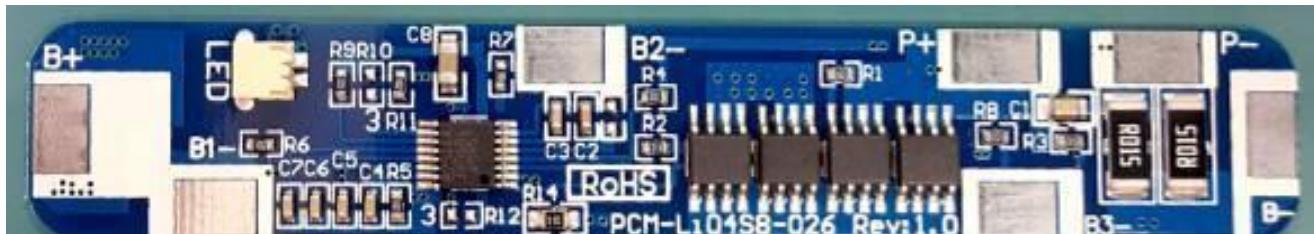

Prepared: Hardy 2017-8-31

Checked:

Approved: